


Active RX Divider 3 Port 50 - 500 MHz AMP3-3 6dB

- Cost effective components for many applications like coupler networks or indoor coverage
- Mounting flange already included, no extra parts needed
- Compact and rugged design with a flat frequency response over a wide range
- Active wideband amplifier included to compensate coupling loss

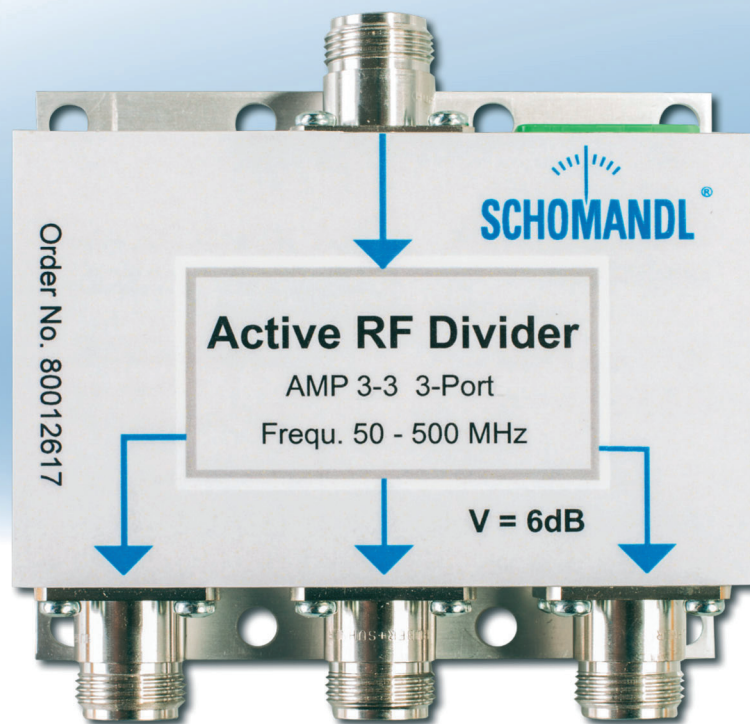

Specifications:

Frequency range:	50- 500 MHz
Gain:	max. 6 dB adjustable internal
VSWR	< 1,15
Ports:	50 Ω N-Connectors 1 input, 3 output
Supply voltage:	+8 ... 15 VDC
Current consumption:	150 mA
Dimensions:	100 x 97 x 40 mm

Order number: **80012617**